




PRODUCT PHOTOGRAPHY

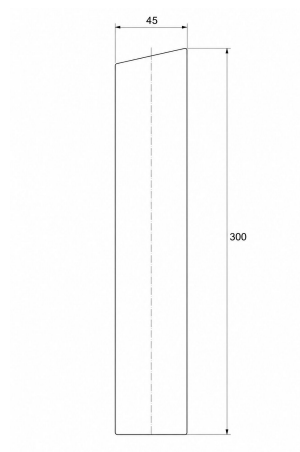

TECHNICAL DIMENSIONS

The Baten Mini is a beautifully crafted timber lighting feature designed to complement gardens, pathways, natural landscapes, and heritage settings. Manufactured from premium oak, it combines timeless materials with discreet lighting to provide subtle and effective outdoor illumination.

Available in two distinctive styles, the Country version features two decorative grooves for added character and traditional detail, while the Wilderness version offers a clean, smooth finish for a more contemporary appearance. Both options integrate naturally into a wide range of landscape designs.

The Baten range can be supplied with a choice of integrated lighting options. The Falu Eyelid delivers a controlled wash of light across pathways and surrounding surfaces, providing effective wayfinding with excellent glare control. Alternatively, the Wanotoobee Wall Light creates a softer, more subtle effect, ideal for gently illuminating paths, defining borders, or highlighting planting and landscape features.

SPECIFICATION

Grey segments are fixed for this product. Choose one option for each bordered segment to build the full order code.

LM	E	B204	—	XXX	—	XXXX	—	070	—	3000	—	90
brand	exterior	product		finish		product		beam		cct		cri

FINISH		PRODUCT	
OAC	Oak Country	F122	FALTU Eyelid 1W
OAW	Oak Wilderness	W126	WANOTOOBEE Wall Light

Example: **LMEB204-OAC-F122-070-3000-90** — Oak Country finish, FALTU Eyelid 1W, 70° beam, 3000K, >90 CRI

Unsure? State your selections in plain text and we'll confirm the full code.

The information presented in this document is for information purposes only. We reserve the right to make technical and design changes at any time and without notice.

Product Installation & Maintenance



SAFETY

Isolate the power supply and confirm it is de-energised before proceeding. Installation and repair should be performed by a qualified electrician in accordance with applicable local legislation and electrical regulations.

1

Electrical Connection

This fitting requires a compatible constant current LED driver (sold separately). Ensure the driver matches the fitting's power requirements, control type, and total circuit load.

IMPORTANT: Do not apply power to the driver before the output load (the light fitting) is fully connected.

Wiring Polarity: Connect the Red wire to positive (+) and the Black wire to negative (-).

Series Connection: When installing multiple fittings to a single driver, they must be wired in series. Ensure the total forward voltage of the fittings does not exceed the maximum voltage rating of the driver. Ensure all electrical connections are appropriately protected against the ingress of moisture and dust.

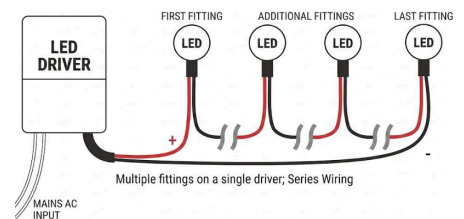


FIG 2

2

Final Installation

Prepare Springs: Engage the spring clips into their installation position as required by the specific model (typically by compressing or folding them upward/inward).

Insert Fitting: Feed the electrical connection and the fitting through the mounting hole, ensuring the springs remain under tension.

Secure Fitting: Carefully release the springs once they are clear of the mounting hole. The spring tension will pull the fitting flush against the surface.

Final Check: Ensure the fitting is centered and sits tightly against the material. The compression of the springs should prevent any loosening or movement over time.

3

Ongoing Care & Maintenance

Cleaning: Clean the fitting by hand using a soft duster or a lightly damp cloth.

Avoid Damage: Do not use abrasive materials, polishing pads, or harsh chemical cleaners, as these may damage the finish.

Longevity: Regular cleaning helps maintain optimal light output.

Documentation: Please retain this manual for future reference. Product supply and warranty are subject to our standard Terms and Conditions.

The information presented in this document is for information purposes only. We reserve the right to make technical and design changes at any time and without notice.